






Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 CFR § 1.53(b))</i>		Attorney Docket No. 1689.001/0001 First Inventor or Application Identifier William R. Randy Title System and Method for Electronic Inventory Express Mail Label No. _____																																																									
APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents</i>		ADDRESS TO Assistant Commissioner for Patents Box Patent Application Washington, DC 20231																																																									
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <i>(Submit an original, and a duplicate for fee processing)</i> 2. <input checked="" type="checkbox"/> Specification [Total Pages 45] <i>(preferred arrangement set forth below)</i> • Descriptive title of the invention • Cross References to Related Applications • Statement Regarding Fed sponsored R & D • Reference to Microfiche Appendix • Background of the invention • Brief Summary of the invention • Brief Descriptions of the Drawings (if filed) • Detailed Description • Claim(s) • Abstract of the Disclosure 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 10] 4. <input checked="" type="checkbox"/> Oath or Declaration/Power of Attorney [Total Pages 3] a. <input type="checkbox"/> Newly executed (original or copy) b. <input checked="" type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <i>(for continuation/divisional with Box 17 completed)</i> <i>[Note Box 5 below]</i> i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §§ 1.63(d)(2) and 1.33(b) 5. <input checked="" type="checkbox"/> Incorporation By Reference <i>(useable if Box 4b is checked)</i> The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.		6. <input type="checkbox"/> Microfiche Computer Program <i>(Appendix)</i> 7. Nucleotide and/or Amino Acid Sequence Submission <i>(if applicable, all necessary)</i> a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies																																																									
ACCOMPANYING APPLICATION PARTS																																																											
8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement <input type="checkbox"/> Power of Attorney <i>(when there is an assignee)</i> 10. <input type="checkbox"/> English Translation Document <i>(if applicable)</i> 11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 12. <input checked="" type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Two Return Receipt Postcards (MPEP 503) <i>(Should be specifically itemized)</i> 14. <input type="checkbox"/> *Small Entity Statement(s) <input checked="" type="checkbox"/> Statement filed in prior application, Status still proper and desired 15. <input type="checkbox"/> Certified Copy of Priority Document(s) <i>(if foreign priority is claimed)</i> 16. <input checked="" type="checkbox"/> Other: 37 C.F.R. § 1.136(a)(3) Authorization <input type="checkbox"/> Other: <small>*NOTE FOR ITEMS 1 & 11: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.17), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28)</small>																																																											
17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment. <input checked="" type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-Part (CIP) of prior application No: 08/975,969 Prior application information: Examiner: J. Myhre Group/Art Unit: 2765																																																											
18. CORRESPONDENCE ADDRESS																																																											
<input type="checkbox"/> Customer Number or Bar Code Label _____ <i>(Insert Customer No. or Attach bar code label here)</i> or <input checked="" type="checkbox"/> Correspondence address below																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="4">NAME</td> <td colspan="4">STERNE, KESSLER, GOLDSTEIN & FOX P L L C</td> </tr> <tr> <td colspan="4"></td> <td colspan="4">Attorneys at Law</td> </tr> <tr> <td colspan="4">ADDRESS</td> <td colspan="4">Suite 600, 1100 New York Avenue, N.W.</td> </tr> <tr> <td colspan="2">CITY</td> <td colspan="2">Washington</td> <td colspan="2">STATE</td> <td colspan="2">DC</td> </tr> <tr> <td colspan="2">COUNTRY</td> <td colspan="2">USA</td> <td colspan="2">TELEPHONE</td> <td colspan="2">(202) 371-2600</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">ZIP CODE</td> <td colspan="2">20005-3934</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">FAX</td> <td colspan="2">(202) 371-2540</td> </tr> </table>				NAME				STERNE, KESSLER, GOLDSTEIN & FOX P L L C								Attorneys at Law				ADDRESS				Suite 600, 1100 New York Avenue, N.W.				CITY		Washington		STATE		DC		COUNTRY		USA		TELEPHONE		(202) 371-2600						ZIP CODE		20005-3934						FAX		(202) 371-2540	
NAME				STERNE, KESSLER, GOLDSTEIN & FOX P L L C																																																							
				Attorneys at Law																																																							
ADDRESS				Suite 600, 1100 New York Avenue, N.W.																																																							
CITY		Washington		STATE		DC																																																					
COUNTRY		USA		TELEPHONE		(202) 371-2600																																																					
				ZIP CODE		20005-3934																																																					
				FAX		(202) 371-2540																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2">NAME (Print/Type) Robert S. Kohl</td> <td colspan="2">Registration No. (Attorney/Agent) 36,013</td> </tr> <tr> <td colspan="2">SIGNATURE </td> <td colspan="2">Date 6/1/99</td> </tr> </table>				NAME (Print/Type) Robert S. Kohl		Registration No. (Attorney/Agent) 36,013		SIGNATURE 		Date 6/1/99																																																	
NAME (Print/Type) Robert S. Kohl		Registration No. (Attorney/Agent) 36,013																																																									
SIGNATURE 		Date 6/1/99																																																									

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.

ATTORNEYS AT LAW

1100 NEW YORK AVENUE, N.W., SUITE 600

WASHINGTON, D.C. 20005-3934

(202) 371-2600

FACSIMILE (202) 371-2540, (202) 371-6566

ROBERT GREENE STERNE
EDWARD J. KESSLER
JORGE A. GOLDSTEIN
SAMUEL L. FOX
DAVID K.S. CORNWELL
ROBERT W. ESMOND
TRACY-GENE G. DURKIN
MICHELE A. CIMBALA
MICHAEL B. RAY
BERT E. SONOHL

ERIC K. STEFFE
MICHAEL Q. LEE
STEVEN R. LUDWIG
JOHN M. COVERT**
LINDA E. ALCORN
RAZ E. FLESHNER
ROBERT C. WILSONIG
MICHAEL V. MESSINGER
JUDITH U. KIM
TIMOTHY J. SHEA, JR.

DONALD R. MCPHAIL
PATRICK E. GARRETT
STEPHEN G. WHITESIDE
NOEL B. WHITLEY
JEFFREY T. HELVEY**
HEIDI L. KRAUS
JEFFREY R. KURIN
RAYMOND MILLIEN
PATRICK D. O'BRIEN
BRIAN S. ROSENBLUM

LAWRENCE B. BUGAISKY
CRYSTAL D. SAYLES*
EDWARD W. YEE
ALBERT L. FERRO*
DONALD R. BANOWIT*
PETER A. JACKMAN*
MOLLY A. MCCALL*
TERESA U. MEDLER*
JEFFREY S. WEAVER*

DONALD J. FEATHERSTONE**
KAREN R. MARKOWICZ**
GRANT E. REED**
SUZANNE E. ZISKA**
BRIAN J. DEL BUONO**
CAMERON N. TOUSI**
VINCENT L. CAPUANO**
ROBERT H. BENSON*
OF COUNSEL

*BAR OTHER THAN D.C.

**REGISTERED PATENT AGENTS

June 1, 1999

WRITER'S DIRECT NUMBER:

(202) 371-2677

INTERNET ADDRESS:

RSOKOHL@SKGF.COM

Assistant Commissioner for Patents
Washington, D.C. 20231

Box Patent Application

Re: U.S. Non-Provisional Utility Patent Application under 37 C.F.R. § 1.53(b)
Appl. No. To be assigned; Filed: Herewith
For: **System and Method for Electronic Inventory**
Inventor(s): Bandy *et al.*
Our Ref: 1689.0010001

Sir:

The following documents are forwarded herewith for appropriate action by the U.S. Patent and Trademark Office:

1. PTO Utility Patent Application Transmittal Form (PTO/SB/05);
2. U.S. Utility Patent Application entitled:

System and Method for Electronic Inventory

and naming as inventor(s):

William R. Bandy
Michael R. Arneson
Robert A. Williams

the application consisting of:

- a. A specification containing:


- Assistant Commissioner for Patents
- June 1, 1999
- Page 2

- (i) 25 pages of description prior to the claims;
 - (ii) 19 pages of claims (91 claims);
 - (iii) a one (1) page abstract;
 - b. 10 sheet(s) of drawings: (Figures 1-10);
 - c. A copy of the executed combined Declaration and Power of Attorney, as filed in U.S. Appl. No. 08/975,969;
3. PTO Fee Transmittal Form PTO/SB/17 (*in duplicate*);
 4. Authorization to Treat a Reply as Incorporating an Extension of Time under 37 C.F.R. § 1.136(a)(3) (*in duplicate*);
 5. A Preliminary Amendment;
 6. Two (2) return postcards; and
 7. Our check No. 24551 for \$380.00 to cover the application filing fee.

It is respectfully requested that, of the two attached postcards, one be stamped with the filing date of these documents and returned to our courier, and the other, prepaid postcard, be stamped with the filing date and unofficial application number and returned as soon as possible. The U.S. Patent and Trademark Office is hereby authorized to charge any fee deficiency, or credit any overpayment, to our Deposit Account No. 19-0036. A duplicate copy of this letter is enclosed.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.



Robert Sokohl
Attorney for Applicants
Registration No. 36,013

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Bandy *et al.*

Appl. No.: To be assigned

Filed: Herewith

For: **System and Method for Electronic
Inventory**

Art Unit: To be assigned

Examiner: To be assigned

Atty Docket: 1689.0010001

Preliminary Amendment

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Prior to examination of the above-captioned application, Applicant submits the following Amendments and Remarks.

In the Specification:

Page 1, between "Background of the Invention" and "Field of the Invention" (lines 2 and 3), insert --This application is a continuation of application no. 08/975,969, filed November 27, 1997 (allowed)--.

In the Claims:

Please cancel claims 1-75 without prejudice or disclaimer.

Remarks

Upon entry of the foregoing amendments, claims 76-91 are pending in the application. These changes are believed to introduce no new matter, and their entry is respectfully requested.

Appl. No.: To be assigned

The Examiner is invited to telephone the undersigned representative if he believes that an interview might be useful for any reason.

Respectfully submitted,

STERNE, KESSLER, GOLDSTEIN & FOX P.L.L.C.



Robert Sokohl
Attorney for Applicants
Registration No. 36,013

Date: 6/1/99
1100 New York Ave., Suite 600
Washington, D.C. 20005
(202) 371-2600

RES/mmb
P:\USERS\MICHELLE\ROB\1689\16890011 pre

System and Method for Electronic Inventory

Background of the Invention

Field of the Invention

5 The present invention relates generally to electronic inventory systems, and more particularly to the use of radio frequency identification (RFID) tags using anti-clash protocols.

Description of the Related Art

10 In modern business, maintaining an accurate inventory of merchandise is crucial. In the past, taking an inventory was an entirely manual process, and therefore slow and expensive. Modern automated inventory systems have improved the accuracy and speed of this process while reducing its cost. With the development of modern manufacturing methods, such as Just-In-Time Delivery, even faster and more accurate inventory methods are required. In some businesses, such as the baggage-handling aspect of the airline industry,
15 inventories must be taken almost instantaneously.

 Especially in the airline baggage handling industry, the need for quick and accurate inventories of bags cannot be exaggerated. In the past, the failure to match bags to passengers was merely an inconvenience. However, in the modern age of airline terrorism, the need to match passengers to bags has become a
20 crucial safety concern. Following several airline bombings, the Commission on Aviation Safety and Security issued several recommendations to President Clinton on September 5, 1996 to combat such terrorism. One of the recommendations stated: "Match passengers to their bags to ensure that the baggage of anyone who does not board the plane is removed."

25 One approach to electronic inventory systems is the use of RFID tags. In such systems, an RFID tag is attached to each item to be inventoried. Each tag includes a microprocessor and RF circuitry capable of responding to signals sent

from a tag reader. In an ideal inventory system, each tag is assigned a unique tag identification number (Tag ID).

In one such system, the reader transmits a series of clock pulses to the tags. Each clock pulse defines a time slot. Each tag selects a particular time slot using a random number generator and then counts the received time slots. When a given tag's time slot is reached, the tag transmits its Tag ID to the reader. The reader records the received Tag IDs to create an inventory of the tags read.

This approach can suffer from a problem known as "time slot contention." Time slot contention occurs when more than one tag selects the same time slot for Tag ID transmission. When this occurs, the reader is bombarded by more than one tag transmission simultaneously. Because the tag signals interfere with each other, the reader cannot identify the tags.

Summary of the Invention

The present invention is a system and method for conducting an inventory of tags, wherein each tag is permanently assigned a Tag ID and a manufacturer number; preferably, this assignment takes place at the time of tag manufacture. Each tag can be attached to an item to take inventory of those items. A tag reader transmits a wake-up signal followed by at least one clock signal. Each tag increments a first tag count in response to the clock signals, and transmits the Tag ID assigned to the tag when the first tag count corresponds to the Tag ID assigned to the tag. The tag reader records the transmitted Tag IDs. When more than one tag transmits simultaneously, the tag reader stores the contended Tag ID in order to resolve the contention when the first read cycle is complete. In the second read cycle, the tag reader transmits the contended Tag ID followed by at least one clock signal. Each tag that contended for the transmitted Tag ID increments a second tag count in response to the clock signals, and transmits the manufacturer number assigned to the tag when the second tag count corresponds to the

manufacturer number assigned to the tag. The tag reader records the transmitted Tag IDs, completing the inventory of the tags.

Brief Description of the Figures

5 The present invention will be described with reference to the accompanying drawings.

FIG. 1 depicts a tag reader and a plurality of tags according to the present invention for use in an electronic inventory system.

FIG. 2 is a flowchart depicting the operation of the present invention according to a preferred embodiment.

10 FIG. 3 is a circuit block diagram of an RFID tag according to a preferred embodiment of the present invention.

FIG. 4 is a circuit block diagram of the architecture of tag reader 104 according to a preferred embodiment.

15 FIG. 5 is a flowchart depicting a first read operation of a timed broadcast read of the present invention.

FIG. 6 is a flowchart depicting a second read operation of a timed broadcast read of the present invention.

FIG. 7 is a flowchart depicting a third read operation of a timed broadcast read of the present invention.

20 FIG. 8 is a flowchart depicting a method of manufacture for the RFID tag of the present invention.

FIG. 9 depicts a pair of tags according to the present invention.

FIG. 10 is a flowchart depicting an example use of an embodiment of the present invention in the airline baggage handling industry.

Detailed Description of the Preferred Embodiments

Introduction

The present invention is a system and method for electronic inventory using radio frequency identification (RFID) tags and anti-clash protocol. The anti-clash protocol solves the above-mentioned problem of time slot contention. The present invention is particularly suited to use in the airline baggage-handling industry. In particular, the present invention is ideally suited for use in taking rapid inventories of passenger bags and then matching passenger bags to passengers.

The present invention involves the use of an RFID tag that is inexpensive, disposable, and ideally suited to mass production. In one embodiment, each tag is produced as a pair of tags. One of the pair is affixed to an airline passenger's ticket; the other is attached to the passenger's bag. The bags, and the passengers themselves, can then be inventoried nearly instantaneously using an unobtrusive, low power radio signal.

FIG. 1 depicts a tag reader 104 and a plurality of tags 102a - 102g for use in an electronic inventory system. In a preferred embodiment of the present invention, each tag is permanently allocated a unique Tag ID. In a preferred embodiment, this assignment takes place at the time of tag manufacture using technologies such as laser-programming or fusible link, which are well-known in the relevant arts. In one embodiment, the Tag ID defines a time slot during which a tag will respond to tag reader 104. The Tag ID can be encrypted for security purposes. In another embodiment, the Tag ID is a separate value. Referring to FIG. 1, tag 102a is assigned to slot T_1 , tag 102b is assigned time slot T_2 , and so on.

Each tag is also assigned a manufacturer number, representing the identity of the manufacturer of the tag, and a lot number, representing the manufacturing lot of the tag. In a preferred embodiment, this assignment takes place at the time of tag manufacture. For example, the lot number may specify the date and time

of manufacture, the wafer number of the integrated circuit on the tag, etc. In a preferred embodiment, the Tag ID, manufacturer number and lot number are laser-programmed into the tag at the time of tag manufacturer. Therefore, these values are permanently fixed at the time of manufacture and cannot subsequently be changed.

Referring to FIG. 1, in a preferred embodiment of the present invention, tag reader 104 emits a series of clock instructions. Each clock instruction defines a time slot. Tags 102 count the time slots. When the time slot count is equivalent to the Tag ID programmed into a tag, the tag transmits its Tag ID to tag reader 104. In this way, tag reader 104 accumulates the Tag IDs of the inventory tags.

FIG. 2 is a flowchart depicting the operation of the present invention according to a preferred embodiment. The flowchart illustrates the present invention's use of multiple reads and multiple tag identifiers to avoid time slot contention. Referring to FIG. 2, the tags are read for the first time as described above with respect to FIG. 1, and as shown in a step 202. If no time slot contention is detected, as shown by the "no" branch from step 204, then the inventory is complete and accurate.

As described above, time slot contention occurs when multiple tags transmit to the reader in the same time slot. The tag reader can detect this contention in many ways that are well known in the art. For example, each tag could error-code its transmission, for example by using a checksum. When the tag reader receives a tag transmission, it computes a checksum. If two tags transmit simultaneously, the computed checksum will not match the transmitted checksum. When tag reader 104 determines that these checksums do not match, then time slot contention has been detected. Other methods of detecting time slot contention may be employed with the present invention without departing from its spirit and scope.

If during the first tag read contention was detected, as shown by the "yes" branch from step 204, then a second tag read is performed, as shown in a step 206. While the first tag read was based on Tag IDs, the second tag read is based

on a separate value that was permanently programmed into the tag at the time of tag manufacture. In a preferred embodiment, that second value is the manufacturer number of the tag.

During the second read, each contended tag ID is resolved separately. For each contended Tag ID, only those tags that contended for that Tag ID are polled.

In the second read cycle, tag manufacturer numbers are used to select the time slot during which the tag will transmit. If no contention is detected in the second read, as shown by the "no" branch from step 208, then the Tag IDs of the tags that contended in the first read have been recorded by the tag reader, and the inventory is complete. However, if time slot contention is detected during the second read, as shown by the "yes" branch from step 208, then a third tag read is performed, as shown in a step 210.

In the third read, each contended manufacturer number is resolved separately. For each contended manufacturer number, only those tags that contended for that manufacturer number are polled. In the third read cycle, a third permanent tag identifier is used to break the contention of the second read. These third identifiers are programmed into each tag at the time of manufacture. In a preferred embodiment, this third value is the lot number of the tag. In the unlikely event that the third tag read does not resolve all time slot contentions, further similar read operations may be performed without departing from the spirit and scope of the present invention.

Now the architecture of the tag is described. FIG. 3 is a circuit block diagram of an RFID tag according to a preferred embodiment of the present invention. The particular circuit of FIG. 3 is presented by way of example only. Other circuits can be employed without departing from the spirit and scope of the present invention, as would be apparent to one skilled in the relevant art. Tag 102 includes at least one antenna 302, a power converter 304, a demodulator 306, a clock recovery circuit 308, an instruction interpreter 310, a counter/shift register 312, a plurality of laser-programmable taps 314a - 314c, a plurality of tap decoder logic circuits 316a - 316c, a multiplexer 318, and a modulator 320. In a preferred

embodiment antenna 302 is an omnidirectional antenna, with its impedance matched to the frequency of transmission.

In the depicted embodiment, system power for each tag is provided by a charging signal transmitted by the reader prior to the tag reading operation. Power converter circuit 304 is used to convert the received charging signal to system power. Such power converter circuits are well known in the art. In a preferred embodiment, the charging signal need only be present for a short time to fully charge the tags. In an alternative embodiment, power converter 304 is replaced by a battery. In that embodiment, the tag reader 104 is not required to transmit a charging signal.

Demodulator 306 receives signals from tag reader 104 via antenna 302. In a preferred embodiment, the received signals comprise a charging signal and one or more instructions. These instructions are described in detail below. One such instruction includes a count instruction that instructs the tags to increment their counter/shift registers 312. In one embodiment, the count instruction causes counter/shift registers 312 to increment by one; in alternative embodiments, the instruction causes counter/shift registers 312 to increment by other values.

In a preferred embodiment, the instructions are transmitted by tag reader 104 using a phase-modulated RF signal using a several hundred kilohertz baud rate and a 900 megahertz carrier frequency. The instructions are sent by the reader with a "return to center" data format; this format is well-known in the art. The instructions are decoded by the tag to generate digital input for instruction interpreter 310 and a system clock. The system clock is recovered by clock recovery circuit 308.

Instruction interpreter 310 receives instructions from demodulator 306, and provides control signals and data to counter/shift register 312 and multiplexer 318. Laser programmable taps 314a - 314c are permanently programmed with predetermined values at the time of tag manufacture. In a preferred embodiment, taps 314a - 314c are programmed by laser-cutting specific output taps of a collection of inverters. As would be apparent to one skilled in the relevant arts,

other technologies can be used to permanently program these values without departing from the scope of the present invention. In a preferred embodiment, taps 314a are programmed with the Tag ID, taps 314b are programmed with the tag manufacturer number and taps 314c are programmed with the tag lot number.

5 Decoder logic circuits 316a - 316c are used to monitor the outputs of programmable taps 314a - 314c. For example, when the value in counter/shift register 312 is the same as the value programmed into Tag ID taps 314a, Tag ID logic 316a decodes a Tag ID enable signal, which is provided to multiplexer 318.

10 Control line 322 is used by instruction interpreter 310 to indicate to multiplexer 318 which read cycle is being executed (that is, which permanently-programmed tag value is being tested). For example, during the second read cycle, the manufacturer number is being tested. When the counter/shift register 312 reaches the manufacturer number programmed into manufacturer taps 314b, manufacturer number logic 316b provides an enable signal to multiplexer 318.
15 This enable signal is selected by control line 322 to cause shift register 312 to shift its contents (the Tag ID) to modulator 320 for transmission to tag reader 104.

As will be described below, the second read cycle is initiated by providing a second read instruction to instruction interpreter 310. In response to that instruction, instruction interpreter indicates to multiplexer 318 that the
20 manufacturer number is being tested. In response, multiplexer 318 gates only the manufacturer number enable signal to counter/shift register 312. This enable signal causes counter/shift register 312 to shift the count, which is equivalent to the manufacturer number, to modulator 320 for transmission to the reader. In this way, the manufacturer number of a tag is transmitted to tag reader 104 when the count reaches the manufacturer number. Thus, the time at which the tag transmits
25 during the second read cycle is controlled by the tag manufacturer number. As further described below, this mechanism is used to solve time slot contention problems.

30 Modulator 320 transmits the data provided by counter/shift register 312 to tag reader 104 via antenna 302 using amplitude-modulated (AM) RF back

scatter signals. In a preferred embodiment a several hundred kilohertz baud rate is used with a 900 megahertz carrier frequency. Because the tag system clock is derived from the signal provided by the tag reader, the data sent by the tag to the reader is clock-synchronized with the reader.

5 In one embodiment, tag 102 also contains one or more sensors. Data collected by the sensors is routed to counter/shift register 312 each time tag 102 transmits. The sensor data is appended to the tag transmission and recorded by tag reader 104. In one embodiment, the sensor is a gas sensor that detects the presence of chemicals associated with drugs or precursor chemicals of explosives, 10 such as methane. When a tag equipped with such a sensor is used as a baggage tag, it is a powerful mechanism for quickly locating bags containing contraband or explosives.

The architecture of tag reader 104 is now described. FIG. 4 is a circuit block diagram of the architecture of tag reader 104 according to a preferred 15 embodiment. The circuitry of tag reader is described in three categories: generic circuitry, processing circuitry, and application-specific circuitry.

Referring to FIG. 4, tag reader processing circuitry is represented by computer 402. Computer 402 performs high level processing functions not provided by tag reader generic circuitry. These high level functions include 20 compiling inventory lists, handling time slot contentions, and the like, as would be apparent to one skilled in the relevant art. Computer 402 may be physically co-located with tag reader 104, as in the case of a stationary tag reader, or may be physically separate from tag reader 104, as may be the case with a hand-held or portable tag reader. The connection 424 between computer 402 and command 25 controller 404 may be hard-wired or wireless.

Application-specific tag reader circuitry is represented by PCMCIA (Personal Computer Memory Card International Association) card 420. In a preferred embodiment, details regarding specific tags, applications, encryption scheme, sensor configuration and data, and modes of operation to be used can be 30 embodied in PCMCIA card 420. In this embodiment, a generic tag reader 104

can be used for multiple inventory applications by merely using different PCMCIA cards.

The remaining circuitry in FIG. 4 comprises tag reader generic circuitry. This is the circuitry required by tag reader 104 to perform generic functions under the control of computer 402 and one or more PCMCIA cards 420. Generic tag reader circuitry includes command controller 404, counter/clock 406, modulator 408, one or more antennas 410, demodulator 412, clock recovery circuit 414, digital processor 416, memory 424, PCMCIA decoder 418, and manual interface 422.

In a preferred embodiment, tag contention is not addressed immediately after it occurs, but rather is resolved in a further read cycle. When a tag contention is detected, tag reader 104 stores the contended time slot number in memory 424. In a further read cycle, tag reader 104 retrieves each contended time slot number from memory 424 for resolution. To keep track of the time slots, tag reader 104 employs a clock/counter 406. Clock/counter 406 responds to the count instructions transmitted by tag reader 104 to tags 102. In this way, the contents of clock/counter 406 are the same as the contents of counter/shift register 312 in each tag 102. Thus, when tag reader 104 detects time slot contention, it can record the contended time slot number by storing the contents of clock/counter 406.

Command controller 404 generates data and instructions under the control of computer 402. These data and instructions are transmitted via modulator 408 and antenna 410 to tags 102. Tag transmissions are received via antenna 410 and demodulator 412 by digital processor 416, which communicates with computer 402 via command controller 404. In one embodiment, a system clock may be derived by clock recovery circuit 414 for use in analyzing tag transmissions. The PCMCIA card 420 is coupled to tag reader 104 via a PCMCIA decoder 418. A manual interface 422 provides the operator with control over the tag reader 104.

Modes of Operation - Timed Broadcast Read

As described above, the present invention provides at least three modes of operation: timed broadcast read, immediate read, and specific tag read. Timed broadcast read allows an ensemble of tags (from a few to several thousand) to be read within a time frame of a few seconds. FIG. 2 is a high-level flowchart of the timed broadcast read mode of operation of the present invention. FIG. 5 is a flowchart depicting the first read operation of the timed broadcast read of the present invention. During the first read operation, the tag reader steps the tags through a sequence of time slots. When a tag detects that a time slot matches its preprogrammed time slot, the tag transmits its Tag ID. If more than one tag transmits in the same time slot, the tag reader stores the time slot number for future resolution of the time slot contention.

First Read Cycle

Referring to FIG. 5, the timed broadcast read mode of operation begins when the tag reader transmits a first instruction alert to the tags, as shown in a step 502. The first instruction alert signals to the tags that this is the first instruction in the timed broadcast read mode of operation. In response, the tags initialize. In particular, the tags initialize their counters /shift registers 312, as shown in a step 504. The tag reader then repeatedly transmits a clock increment instruction, as shown in a step 506. In response to the increment instruction, each tag increments the count in its counter/shift register 312, as shown in Step 508. When a tags counter/shift register 312 output matches the Tag ID programmed into Tag ID taps 314a, as indicated by the "yes" branch from step 510, the tag transmits its Tag ID as shown in a step 512 and described above.

In an alternative embodiment, the tag does not transmit its Tag ID, but instead transmits a simple response signal, when a tags counter/shift register 312 output matches the Tag ID programmed into Tag ID taps 314a. The response signal need not convey any information describing the identity of the tag. Indeed, the response signal need not convey any information at all. The response signal

need only indicate that a tag is present. In this embodiment, tag reader 104 keeps track of the count in the tag counter/shift register 312 by using an internal counter/clock 406. Counter/clock 406 is initialized in step 504, and is incremented in step 508 in response to the transmitted clock instruction. When tag reader 104 receives a response signal, tag reader 104 records the count in counter/clock 406. Because the tag transmitted the response signal when the count in its counter/shift register 312 equaled its Tag ID, and because the counter/clock 406 also contains that count, the presence of the particular tag that transmitted the response signal is recorded by recording the count in counter/clock 406. In a preferred embodiment, the response signal contains sufficient information for tag reader 104 to detect response signal contention when it occurs.

If more than one tag transmits in the same time slot, tag reader 104 detects time slot contention. If time slot contention is detected, as shown by the "yes" branch from step 514, tag reader 104 stores the Tag ID, as shown in a step 516. Tag reader 104 keeps track of the Tag ID using counter/clock 406. Tag reader 104 will use the Tag IDs to resolve the time slot contention for those Tag IDs in a second read cycle, which is described below and corresponds to step 206 in FIG. 2.

Second Read Cycle

In a preferred embodiment, the present invention employs a second read cycle to solve time slot contentions that occurred during the first read cycle. FIG. 6 is a flowchart depicting the operation of the present invention in the second read cycle according to a preferred embodiment. During the second read cycle, the system examines contentions for each Tag ID individually. For each contended Tag ID, tag reader 104 causes tags 102 to count in unison. When a tag's count matches its manufacturer number, the tag transmits that manufacturer number. In this way, the tag's manufacturer number controls the time slot during which the tag transmits. Because it is highly unlikely that more than one tag will have the

same Tag ID and manufacturer number, it is unlikely that two tags will transmit in the same time slot during the second read. Therefore, Tag ID contention is resolved by the second read. In the unlikely event that multiple tags have the same Tag ID and manufacturer number, contention can be resolved using a third read cycle, as described below.

Referring to FIG. 6, tag reader 104 initiates the second read cycle by sending a second read mode instruction to tags 102, as shown in a step 602. The reader then transmits a contended Tag ID to the tags, as shown in a step 604. The step permits only those tags that contended for a particular Tag ID to participate in contention resolution for that Tag ID. In response to the transmission of the contended Tag ID, only those tags having that Tag ID initialize their counters/shift registers 312, as shown in a step 606.

Tag reader 104 then transmits the first in a series of increment instructions, as shown in a step 608. In response, the contending tags increment their counter/shift registers 312, as shown in a step 610. When the output of a tag's counter/shift register 312 matches the tag manufacturer number permanently programmed into manufacturer number taps 314b, as indicated by the "yes" branch from step 612, the tag transmits its manufacturer number, as shown in a step 614.

In an alternative embodiment, the tag transmits a simple response signal as described above. Tag reader 104 then records the tag's manufacturer number by storing the count in its counter/clock 406, as described above for the Tag ID.

If more than one tag transmits its manufacturer number simultaneously, tag reader 104 detects the contention, as indicated by the "yes" branch from step 616, and tag reader 104 stores the contended manufacturer number for future contention resolution in a third read cycle, as shown in a step 618.

Tag reader 104 steps tags 102 through a predetermined range of possible manufacturer numbers. When the last count is reached, as indicated by the "yes" branch from step 620, the process of steps 604 through 618 is repeated for the

next contended Tag ID. When the last contended Tag ID has been examined, as indicated by the "yes" branch from step 622, the second read cycle is complete.

Third Read Cycle

In one embodiment, the present invention employs a third read cycle to resolve any time slot contentions that occurred during the second read cycle. FIG. 7 is a flowchart depicting the operation of the present invention in the third read cycle according to a preferred embodiment. During the third read cycle, the system examines contentions for each manufacturer number individually.

For each contended manufacturer number, tag reader 104 causes tags 102 to count in unison. When a tag's count matches its lot number, the tag transmits that lot number. In this way, the tag's lot number controls the time slot during which the tag transmits. Because it is highly unlikely that more than one tag will have the same Tag ID, manufacturer number, and lot number, it is extremely unlikely that two tags will transmit in the same time slot during the third read. Therefore, tag manufacturer number contention is resolved by the third read. In the unlikely event that multiple tags have the same Tag ID, manufacturer number, and lot number, contention can be resolved using a further read cycle based on other tag identification data, as would be apparent to one skilled in the relevant art using the above description.

Referring to FIG. 7, tag reader 104 initiates the third read cycle by sending a third read mode instruction to tags 102, as shown in a step 702. The reader then transmits a contended Tag ID and manufacturer number to the tags, as shown in a step 704. This step permits only those tags that contended for a particular Tag ID and manufacturer number to participate in contention resolution for that Tag ID and manufacturer number. In response to the transmission of the contended Tag ID and manufacturer number, only tags having that particular Tag ID and manufacturer number initialize their counters/shift registers 312, as shown in a step 706.

Tag reader 104 then transmits the first in a series of increment instructions, as shown in a step 708. In response, the contending tags increment their counter/shift registers 312, as shown in a step 710. When the output of a tag's counter/shift register 312 matches the tag lot number permanently programmed into lot number taps 314c, as indicated by the "yes" branch from step 712, the tag transmits its manufacturer number, as shown in a step 714.

In an alternative embodiment, the tag transmits a simple response signal as described above. Tag reader 104 then records the tag's lot number by storing the count in its counter/clock 406, as described above for the Tag ID.

If more than one tag transmits its lot number simultaneously, tag reader 104 detects the contention, as indicated by the "yes" branch from step 716, and tag reader 104 stores the contended manufacturer number for future contention resolution in a further read cycle, as shown in a step 718.

Tag reader 104 steps tags 102 through a predetermined range of possible lot numbers. When the last count is reached, as indicated by the "yes" branch from step 720, the process of steps 704 through 718 is repeated for the next contended manufacturer number. When the last contended manufacturer number has been examined, as indicated by the "yes" branch from step 722, the third read cycle is complete.

Immediate Read

Immediate read mode is used to read individual tags one at a time. In this mode, tag reader 104 transmits an instruction to a tag 102 that causes the tag to bypass the time slot counting operation and to immediately transmit its Tag ID number. This mode is useful for rapid Tag identification (on the order of milliseconds) when the individual tag rapidly passes through the reader zone. An example application is the reading of tags affixed to automobiles passing through an automatic toll booth.

Specific Tag Read

Specific tag read is used to determine whether one particular tag out is present in an ensemble of tags. Tag reader 104 accomplishes this by transmitting the particular Tag ID, manufacturer number, and lot number of the tag 102 that is sought. Because a complete set of Tag identification parameters is transmitted, only the tag being sought should respond. This approach is useful for retrieving a specific tagged item from an ensemble of items, for example for locating and removing a suspicious bag from an airplane cargo hold.

Tag Manufacture

In order to be commercially viable, the RFID tags of the present invention must be inexpensive to manufacture. The present invention encompasses a unique method of manufacture to achieve this goal. FIG. 8 is a flowchart depicting a method of manufacture for the RFID tag 102 of the present invention. This method of manufacture is described with reference to the tag pair depicted in FIG. 9. FIG. 9 depicts a pair of tags 102a, 102b. Such a pair of tags is ideally suited for use in the airline baggage handling industry, as mentioned above and described in detail below. In practice, tags 102a and 102b are separated by the ticketing agent. Tag 102a is affixed to a passenger bag, while tag 102b is affixed to the passenger's ticket. In this way, the airline can ensure that both the passenger and his bag board the same airplane. Each tag 102 includes an antenna 302 and an application-specific integrated circuit (ASIC) 904 mounted on bonding pads.

In one embodiment, baggage tag 102a incorporates multiple tamper-resistant features. Tag 102a can be fixed to a bag by wrapping the tag about the bag's handle and joining tag portions 914a and 914b. In one embodiment, one area of 914 includes ASIC 904 so that attempting to separate areas 914a and 914b after joining destroys the ASIC and renders the tag inoperable. In another embodiment, baggage tag 102a includes one or more perforated tear lines 912. Perforated tear lines 912 tear easily, so that any tampering with tag 102a causes

the tag to separate at a tear line 912. This tearing provides an immediate visual indication of tampering. Tear lines 912 can be placed across critical portions of the tag circuitry, such as antenna 302a, such that tag separation along tear line 912 renders the tag inoperative.

5 As described above, tag 102 is powered by a power source, such as a battery, in one embodiment. In this embodiment, the battery may be formed by placing an anode 910a in one joining area 914a of the tag and placing a cathode 910c in the other joining area of the tag 914b. At least one of anode 910a and cathode 910c is coated with an electrolytic material and covered by a release liner.

10 In another embodiment, tag 102 is powered by a capacitor. In that embodiment, at least one of anode 910a and cathode 910c is coated with a dielectric material and covered by a release liner. Other power sources may be used with tag 102 without departing from the spirit and scope of the present invention, as would be apparent to one skilled in the relevant art.

15 The ticket agent joins the two joining areas 914a,b of tag 102 by removing the release liner and joining cathode 910c to anode 910a, thereby forming the power source of the tag. Any attempt to separate areas 914a,b after joining will destroy the power source formed by anode 910a and cathode 910c, thereby rendering the tag inoperative. In another embodiment, separating areas

20 914a,b after joining also gives a visual indication of tampering. For example, separating areas 914a,b could reveal a large "VOID" sign or some other image or break pattern.

Now the manufacture of tag 102 according to a preferred embodiment is described with reference to FIG. 8. In a step 804 one or more ASICs are

25 manufactured. The ASICs include the inventory response circuitry depicted in FIG. 3. The circuitry includes the circuit elements of FIG. 3 except antenna 302. In one embodiment, all inventory response circuitry is contained upon a single ASIC. In another embodiment, RF circuitry is contained on one ASIC, and digital circuitry is contained on another ASIC. Then, in a step 806, the ASIC

30 containing the digital inventory response circuitry is permanently programmed

with at least the Tag ID and manufacturer number. In one embodiment the ASIC is also programmed with a lot number for the tag. In a preferred embodiment, these values are laser-programmed into taps 314a - 314c, as described above.

Antenna 302 and bonding pads 908 are printed onto a flexible substrate using a conductive ink, as shown in a step 808. Such substrates are readily available from vendors such as 3M Corporation and Flexcon. Such conductive inks are widely available. Finally, the ASIC is flip-chip bonded to bonding pads 908 using a conductive adhesive, as shown in a step 810. One such conductive adhesive is a "z-axis" adhesive, which is well-known in the relevant art and is commercially available. The use of such an adhesive is advantageous in that adhesive conducts only in the z-axis. Therefore, even if the adhesive is applied so as to inadvertently join two bonding pads, the two pads do not short together. In one embodiment the ASIC is also hermetically sealed. In a preferred embodiment, ASIC 904 is manufactured using silicon-on-insulator technology.

As mentioned above, a key consideration in the manufacture of tags 102 is cost. A large component of the cost of manufacture of such items is the cost of testing the ASICs to ensure operability. In a preferred embodiment of the present invention, operability testing is deferred until tag manufacture is complete, as shown in a step 812. Also in the preferred embodiment, tags 102 are manufactured in bulk on a long continuous strip of substrate. The strips can be rolled for easy packaging, delivery, and dispensing. Before packaging, the strip is passed through a testing apparatus, where each tag in the strip is tested for operability. However, rather than attempting to discard inoperable tags, inoperable tags are merely marked as inoperable and are retained on the strip. Then, when a ticket agent encounters a tag marked inoperable in a roll of tags, the ticket agent merely discards the inoperative tag. This process saves considerable cost, and allows the tags of the present invention to be manufactured very inexpensively.

Airline Baggage Handling Example

As described above, the present invention is ideally suited to use in the airline baggage handling industry. An example of this use is presented in the flowchart of FIG. 10. The process begins when a passenger approaches the ticket counter or curbside check-in at the airport, as shown in Step 1004. The passenger then presents his ticket and/or a personal identification in a step 1006. The system captures this information; the system can also capture other authentication information such as biometrics, as shown in a step 1008. When the passenger presents his baggage for check-in, as shown in step 1010, the ticket agent applies a tag to each bag and to the passenger's ticket. In a preferred embodiment, each of these tags bears an identical Tag ID, manufacturer number, and lot number. The system records the Tag ID, flight number, and passenger identity, as shown in a step 1018.

After the bag is sent down the chute to the distribution area, as shown in a step 1022, it is placed on a baggage cart in accordance with the flight number conventionally printed on the baggage tags, as shown in a step 1024. Once on the baggage cart, the bag tags are read to determine the Tag IDs. If the Tag IDs indicate that the bags are not on the proper baggage cart, as indicated by the "no" branch from step 1030, then the bags are visually inspected and redirected to the correct baggage cart, as shown in a step 1028.

The bags are then transported to the proper gate, loaded onto the designated airplane and then read again, as shown in steps 1034, 1036 and 1038. Once on the airplane in the cargo hold, the bags are read again, as shown in a step 1038. If the tag inventory determines that the bags are not on the proper plane, as indicated by the "no" branch from step 1040, then the system sounds an alert, as shown in a step 1056. Alternatively, the bags can be read on the conveyor belt before they are loaded into the cargo hold. After the alert is sounded, the bag can be removed and examined for re-routing as shown in a step 1058.

Once passenger boarding has begun, an inventory of passengers can be performed by scanning the tags on the passenger tickets. If a mismatch is

detected between passengers and bags, as indicated by the "no" branch from step 1044, the identified bags can be pulled for examination and re-routing, as shown in step 1058. As more bags are loaded onto the airplane, the process is repeated, as indicated by the "yes" branch from step 1050. When all of the bags have been loaded as indicated by the "no" branch from step 1050, the system reconciles the collected data, as shown in step 1052.

The example use of the present invention described above provides at least two key benefits. First and foremost, the present invention provides a security benefit. In the example use described above, a would-be airline terrorist cannot place a bomb in his baggage and then have the baggage checked onto a plane unless the terrorist also boards the plane. Clearly, this is a significant deterrent to this form of terrorism.

Second, the present invention provides an efficiency benefit. The problem of lost or misrouted passenger baggage has become epidemic within the airline industry. The example use described above solves this problem. Because a passenger and his baggage must board the same airplane to satisfy the inventory system described above, lost baggage should become a thing of the past.

Electronic Article Surveillance Example

The present invention is also ideally suited to use in electronic article surveillance. In a retail clothing store, for example, a tag can be attached to each article of clothing on display. One or more tag readers can then be used to maintain an inventory of the clothing articles. For example, a tag reader can be placed on each rack or display of clothing. Periodic reads of the rack or display can disclose exactly when an item is removed.

Tag readers placed at the exits to the store can prevent shoplifting. In this example, each item bears a tag. Because the tags are extremely small, they can be placed within an article so as to prevent removal or even discovery. For example, a tag could be placed within a label, button or seam of a garment, the

plastic center of a compact disk, or the case of a videocassette, to facilitate both overt and covert operation.

The store maintains an inventory database of all the articles within the store. Each entry in the database represents a garment and contains the Tag ID of the tag embedded in the article. The entry also indicates whether the item has been purchased. When a tag of an unpurchased article is detected by a door reader, an alarm is sounded, indicating that the article is being shoplifted.

When an item is purchased, its tag ID is removed from the inventory database. Therefore, when a tag attached to a purchased article moves past the door reader, no alarm is sounded. Used alone or with security cameras, the present invention provides an effective tool to combat shoplifting.

In another embodiment, the present invention could be used to implement an "unattended store," i.e. one with no salespersons or clerks. A customer could enter the store, select items and go to a purchasing area. In the purchasing area, a tag reader would identify the customer's selections. The customer would then be presented with a bill. The customer could pay the bill with a credit card, whereupon the unattended store would remove the purchased item from its inventory database. The customer could then leave the store with the purchases.

Example Instruction Set

Now an instruction set is described that can be used with the present invention. As would be apparent to one skilled in the relevant art, other instructions can be employed with the present invention without departing from its spirit and scope. In a preferred embodiment, the reader sends an instruction stream to the tag instruction register that is N_{ir} bits long, where N_{ir} is the number of stages in the instruction register. The instructions have the following data field format and symbolic binary values:

Np: Preamble: alerts the tags that the reader is starting communication. This data field is useful to prevent spurious noise from "spoofing" the tags and to initialize and synchronize the tag clock. The preamble starts with a long

stream of "0" pulses from the reader, which starts the tag clock and initializes the tag instruction register. The 0's are followed by Np bits of a series of "1's", which alerts the tag that a reader instruction is following. Between instruction words, the reader sends out 0's for tag clock generation. When the preamble is present, the symbolic binary for this field is "1". A "0" represents the absence of the preamble.

Nw: Last instruction/ in process/ wake up: This data field is useful for dynamic read environments, where tags are moving into and out of the read zone, and prevents tags entering the read zone during a read cycle from erroneous communication. These tags will be "woken up" at the next read cycle to properly be identified. The "last instruction" sub-field notifies the tag to shut down. The symbolic binary form for this field is:

	• First Instruction Alert:	001
	• Subsequent instructions after wake up:	010
15	• Last instruction; shut down:	100

Nt; Timed read cycle: Second read/ first read: This field instructs the tag to go into the specified timed read cycle (first, second or third), with the following symbolic binary form:

	• No timed read:	000
20	• First read:	001
	• Second read:	010
	• Third read:	100
	• Specific read:	111

Ni; Immediate read: When the symbolic binary form is "1", this field instructs the tag to immediately send out its ID number.

Nr; Specific tag read: When the symbolic binary form is "1", this field instructs the tag to go into the specific tag read mode as designated by Nt, above. The reader will cycle through three instructions to set the tag to the proper state. The first is with Nt=001 and sets the Tag ID counter for the targeted tag. The second is with Nt= 010 and sets up the second counter with the targeted manufacturer number. The third is with Nt= 100 and sets up the third counter with the targeted lot number. Then the reader sends out clock with Nt=111 to read only the targeted tag at every clock instruction.

Nm; Clock/Count: This field sets the counter shift registers (SR's) into either the clocked mode to increment the counter by the next clock signal, or into the SR mode, awaiting the following time slot, wafer/lot number, or date instruction stream. It has the symbolic binary form:

- Clocked mode: 01
- Specific count: 10

Ns; Clock signal/time slot. This data field contains either specific counter instruction data, or a stream of zeroes if the tag is being instructed into the count mode. The symbolic binary form is "1" when there is a specific counter instruction, and "0" for the count mode. When Nm=01 and Ns=0, a clock instruction counter, Nc, is enabled.

Nc: Clock instruction signal to increment counter/shift registers 312. The symbolic binary form is:

- No clock instruction: 00
- Clock: 01
- Last clock: 11

The clock instruction counter, Nc, allows the reader to "short cycle" the tag through the count sequence, bypassing the Nir instruction sequence, which can

be as long as 32, 48, or 64 bits. N_c , on the other hand, could theoretically be as short as 2 bits, although 4 bits is implemented here. Once the clock instruction is sent out, the reader waits for a tag response. If none comes within a specified time frame, it sends out another clock instruction. When a tag responds with its ID number, the reader waits until the ID number transmission is completed before sending out the next clock instruction. If only a few tens to a few hundreds of tags are in the ensemble, this "short cycle" clocking can accelerate tag read time by as much as a factor of 10. On completing the clock read cycle, the full instruction register will be re-enabled for the next sequence of instructions from the reader, such as for any required contention resolution, or for tag shut down.

The n -bit instruction stream is organized as follows: $Nir = N_c/N_s/N_m/N_r/N_i/N_t/N_w/N_p$, with each field comprised of sub-fields in the format described above. This provides the generalized symbolic binary form of $Nir = xx/x/xx/x/x/xxx/xxx/x$ where the x 's represent either 1's or 0's. An example instruction stream is shown below for each operational mode of the tag. The 1's represent a resulting action or state directed by an instruction sub-field while 0's represent the off state of an instruction sub-field.

	Timed Broadcast Read:	$N_c/N_s/N_m/N_r/N_i/N_t/N_w/N_p$
	Initialization:	00 / 0 / 00 / 0 / 0 / 000 / 000 / 0
20	First instruction of first read cycle:	00 / 0 / 01 / 0 / 0 / 001 / 001 / 1
	Following instructions of first read cycle:	01 / 0 / 01 / 0 / 0 / 001 / 010 / 1
	Last clock instruction:	11 / 0 / 01 / 0 / 0 / 001 / 010 / 1
	First instruction for second cycle:	00 / 1 / 10 / 1 / 0 / 010 / 010 / 1
	Following instructions for second cycle:	01 / 0 / 01 / 0 / 0 / 010 / 010 / 1
25	Last clock instruction for second cycle:	11 / 0 / 01 / 0 / 0 / 010 / 010 / 1
	First instruction for third cycle:	00 / 1 / 10 / 1 / 0 / 100 / 010 / 1
	Following instructions for third cycle:	01 / 0 / 01 / 0 / 0 / 100 / 010 / 1
	Last clock instruction:	11 / 0 / 01 / 0 / 0 / 100 / 010 / 1
	Last instruction (tags turn off):	00 / 0 / 00 / 0 / 0 / 000 / 100 / 1

Immediate Read:	Nc/Ns/Nm/Nr/Ni/Nt / Nw / Np
Initialization:	00/ 0 / 00 / 0 / 0 / 000 / 000 / 0
First instruction:	00/ 0 / 00 / 0 / 1 / 000 / 001 / 1
Next and last instruction (tag turns off):	00/ 0 / 00 / 0 / 0 / 000 / 100 / 1

5	Specific Tag Read:	Nc/Ns/Nm/Nr/Ni/Nt / Nw / Np
	Initialization:	00/ 0 / 00 / 0 / 0 / 000 / 000 / 0
	First instruction:	00/ 1 / 10 / 1 / 0 / 001 / 001 / 1
	Second instruction:	00/ 1 / 10 / 1 / 0 / 010 / 010 / 1
	Third instruction:	00/ 1 / 10 / 1 / 0 / 100 / 010 / 1
10	Following clock instructions:	01/ 0 / 01 / 1 / 0 / 111 / 010 / 1
	Last clock instruction:	11/ 0 / 01 / 0 / 0 / 111 / 010 / 1
	First instruction of next specific read:	00/ 1 / 10 / 1 / 0 / 001 / 010 / 1
	Second instruction of next read:	00/ 1 / 10 / 1 / 0 / 010 / 010 / 1
	Third instruction of next read:	00/ 1 / 10 / 1 / 0 / 100 / 010 / 1
15	Following clock instructions:	01/ 0 / 01 / 1 / 0 / 111 / 010 / 1
	Last clock instruction:	11/ 0 / 01 / 0 / 0 / 111 / 010 / 1
	Last instruction (tag turns off):	00/ 0 / 00 / 0 / 0 / 000 / 100 / 1

Conclusion

While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. It will be apparent to persons skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the invention. Thus the present invention should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

What Is Claimed Is:

1 1. A method for conducting an inventory of passenger bags, wherein
2 a bag tag is attached to each bag and each bag tag is permanently assigned a tag
3 identification number (Tag ID) and a manufacturer number, the method
4 comprising the steps of:
5 at a tag reader, transmitting a wake-up signal followed by at least one first clock
6 signal;
7 at each bag tag,
8 incrementing a first tag count in response to said at least one first clock
9 signal, and
10 transmitting the Tag ID assigned to said each bag tag when said Tag ID
11 of said each bag tag corresponds to said first tag count;
12 at said tag reader,
13 incrementing a first reader count in response to said at least one first
14 clock signal,
15 storing a given first reader count when more than one bag tag responds to
16 one of said at least one clock first signal that corresponds to said
17 given first reader count, and
18 transmitting said given first reader count followed by at least one second
19 clock signal; and
20 at each bag tag that responded to said one of said at least one first clock signal
21 that corresponds to said given first reader count,
22 incrementing a second tag count in response to said at least one second
23 clock signal, and
24 transmitting the manufacturer number assigned to said each bag tag that
25 responded to said one of said at least one first clock signal that
26 corresponds to said given first reader count when said
27 manufacturer number of said each bag tag corresponds to said
28 second count.

2. The method of claim 1, wherein a ticket tag is attached to each passenger's ticket and each ticket tag is permanently assigned the Tag ID and the manufacturer number of the bag tag attached to the passenger's bag, further comprising the steps of:
conducting an inventory of the ticket tags according to the method of claim 1;
and
comparing said inventory of ticket tags to the inventory of bag tags to ensure that each passenger and said each passenger's bags board the same vehicle.

3. The method of claim 1, wherein:
each bag tag is permanently assigned a tag ID and a manufacturer number at the time of manufacture.

4. The method of claim 1, wherein at least one bag tag includes a sensor, further comprising the step of:
at the at least one bag tag, transmitting the contents of said sensor.

5. A tag for use in conducting an inventory of passenger bags, wherein each bag is attached to a tag and each tag is permanently assigned a tag identification number (Tag ID) and a manufacturer number, the tag comprising:
means for receiving a wake-up signal followed by at least one first clock signal;
means for incrementing a first tag count in response to said at least one first clock signal;
means for transmitting the Tag ID assigned to the tag when said Tag ID corresponds to said first tag count;
means for receiving at least one second clock signal;
means for incrementing a second tag count in response to said at least one second clock signal; and

12 means for transmitting the manufacturer number assigned to the tag when said
13 manufacturer number of said each tag corresponds to said second count.

1 6. The tag of claim 5, further comprising:
2 a sensor; and
3 means for transmitting the contents of said sensor.

1 7. A reader for conducting an inventory of passenger bags, wherein
2 each bag is attached to a tag and each tag is permanently assigned a tag
3 identification number (Tag ID) and a manufacturer number, the reader
4 comprising:
5 means for transmitting a wake-up signal followed by at least one clock signal;
6 means for incrementing a first reader count in response to said at least one first
7 clock signal,
8 means for receiving a Tag ID transmitted by a tag in response to one of said at
9 least one first clock signal;
10 means for storing a given first reader count when more than one tag responds to
11 one of said at least one first clock signal that corresponds to said given
12 first reader count;
13 means for transmitting said given first reader count followed by at least one
14 second clock signal; and
15 means for receiving a manufacturer number transmitted by a tag in response to
16 one of said at least one second clock signal.

1 8. A system for locating a tag, wherein each tag is assigned a
2 permanent identification number, the system comprising:
3 a tag reader that transmits a wake-up signal followed by a time slot number; and
4 at least one tag that transmits a permanent identification number assigned to said
5 at least one tag when said permanent identification number assigned to
6 said at least one tag corresponds to said time slot number.

1 9. A method for locating a tag, wherein each tag is assigned a
2 permanent identification number, the method comprising the steps of:
3 at a tag reader, transmitting a wake-up signal followed by a time slot number; and
4 at each tag, transmitting a permanent identification number assigned to said each
5 tag when said permanent identification number assigned to said each tag
6 corresponds to said time slot number.

1 10. A system for conducting an inventory of tags, wherein each tag is
2 assigned a permanent identification number, the system comprising:
3 at a tag reader, means for transmitting a wake-up signal followed by at least one
4 clock signal; and
5 at each tag,
6 means for incrementing a tag count in response to said at least one clock
7 signal, and
8 means for transmitting the permanent identification number assigned to
9 said each tag when said permanent identification number of said
10 each tag corresponds to said tag count.

1 11. The system of claim 10, further comprising:
2 at said tag reader, means for transmitting an instruction to perform a tag read.

1 12. The system of claim 10, wherein the duration of tag transmissions
2 is fixed, further comprising:
3 at said tag reader, means for transmitting a further one of said at least one clock
4 signal after the tag transmission duration has elapsed.

1 13. The system of claim 10, further comprising:
2 at said tag reader, means for transmitting a further one of said at least one clock
3 signal after a tag response time has elapsed, wherein said tag response

4 time is the maximum duration of time between a tag reader transmission
5 and the reception at said tag reader of a corresponding tag transmission.

1 14. The system of claim 10, further comprising:
2 at each tag,
3 a sensor; and
4 means for transmitting the contents of said sensor.

1 15. The system of claim 10, wherein:
2 each tag is permanently assigned said permanent identification number at the
3 time of manufacture.

1 16. The system of claim 10, wherein said permanent identification
2 number is encrypted.

1 17. The system of claim 10, further comprising:
2 means for transmitting a charging signal, thereby energizing the tags.

1 18. The system of claim 10, further comprising:
2 at said tag reader, means for incrementing a reader count in response to said at
3 least one clock signal.

1 19. The system of claim 18, further comprising:
2 at said tag reader, means for indicating an error when said reader count does not
3 correspond to said permanent identification number.

1 20. The system of claim 18, wherein:
2 corresponding ones of said permanent identification number and said reader
3 count are identical.

1 21. The system of claim 18, further comprising:
2 at said tag reader, means for storing a given reader count when more than one tag
3 responds to one of said at least one clock signal that corresponds to said
4 given reader count.

1 22. The system of claim 21, wherein each tag is assigned a second
2 permanent identification number, further comprising:
3 at said tag reader, means for transmitting said given reader count followed by at
4 least one second clock signal; and
5 at each tag that responded to said one of said at least one clock signal that
6 corresponds to said given reader count,
7 means for incrementing a second tag count in response to said at least one
8 second clock signal, and
9 means for transmitting the second permanent identification number
10 assigned to said each tag when said second permanent
11 identification number of said each tag corresponds to said second
12 count.

1 23. The system of claim 22, further comprising:
2 at said tag reader, means for transmitting an instruction to perform a second tag
3 read.

1 24. The system of claim 22, further comprising:
2 at said tag reader, means for incrementing a second reader count in response to
3 said at least one second clock signal.

1 25. The system of claim 24, further comprising:
2 at said tag reader, means for indicating an error when said second reader count
3 does not correspond to said second permanent identification number.

1 26. The system of claim 24, further comprising:
2 at said tag reader, means for storing said given reader count and a given second
3 reader count when more than one tag responds to one of said at least one
4 second clock signal that corresponds to said given second reader count.

1 27. The system of claim 26, wherein each tag is assigned a third
2 permanent identification number, further comprising:
3 at said tag reader, means for transmitting said given reader count and said given
4 second reader count followed by at least one third clock signal;
5 at each tag that responded to said one of said at least one second clock signal that
6 corresponds to said given second reader count,
7 means for incrementing a third tag count in response to said at least one
8 third clock signal, and
9 means for transmitting the third permanent identification number
10 assigned to said each tag when said third permanent identification
11 number of said each tag corresponds to said third tag count.

1 28. The system of claim 27, further comprising:
2 at said tag reader, means for transmitting an instruction to perform a third tag
3 read.

1 29. The system of claim 27, further comprising:
2 at said tag reader, means for incrementing a third reader count in response to said
3 at least one third clock signal.

1 30. The system of claim 29, further comprising:
2 at said tag reader, means for indicating an error when said third reader count does
3 not correspond to said third permanent identification number.

1 31. A method for conducting an inventory of tags, wherein each tag
2 is assigned a permanent identification number, the method comprising the steps
3 of:
4 at a tag reader, transmitting a wake-up signal followed by at least one clock
5 signal; and
6 at each tag,
7 incrementing a tag count in response to said at least one clock signal, and
8 transmitting the permanent identification number assigned to said each
9 tag when said permanent identification number of said each tag
10 corresponds to said tag count.

1 32. The method of claim 31, further comprising the step of:
2 at said tag reader, transmitting an instruction to perform a tag read.

1 33. The method of claim 31, wherein the duration of tag transmissions
2 is fixed, further comprising the step of:
3 at said tag reader, transmitting a further one of said at least one clock signal after
4 the tag transmission duration has elapsed.

1 34. The method of claim 31, further comprising the step of:
2 at said tag reader, transmitting a further one of said at least one clock signal after
3 a tag response time has elapsed, wherein said tag response time is the
4 maximum duration of time between a tag reader transmission and the
5 reception at said tag reader of a corresponding tag transmission.

1 35. The method of claim 31, wherein:
2 each tag is permanently assigned a tag ID and a manufacturer number at the
3 time of manufacture.

1 36. The method of claim 31, wherein at least one bag tag includes a
2 sensor, further comprising the step of:
3 at the at least one bag tag, transmitting the contents of said sensor.

1 37. The method of claim 31, wherein said permanent identification
2 number is encrypted.

1 38. The method of claim 31, further comprising the step of:
2 transmitting a charging signal, thereby energizing the tags.

1 39. The method of claim 31, further comprising the step of:
2 at said tag reader, incrementing a reader count in response to said at least one
3 clock signal.

1 40. The method of claim 39, further comprising the step of:
2 at said tag reader, indicating an error when said reader count does not correspond
3 to said permanent identification number.

1 41. The method of claim 39, wherein:
2 corresponding ones of said permanent identification number and said reader
3 count are identical.

1 42. The method of claim 39, further comprising the step of:
2 at said tag reader, storing a given reader count when more than one tag responds
3 to one of said at least one clock signal that corresponds to said given
4 reader count.

1 43. The method of claim 42, wherein each tag is assigned a second
2 permanent identification number, further comprising the steps of:

3 at said tag reader, transmitting said given reader count followed by at least one
4 second clock signal; and
5 at each tag that responded to said one of said at least one clock signals that
6 corresponds to said given reader count,
7 incrementing a second tag count in response to said at least one second
8 clock signal, and
9 transmitting the second permanent identification number assigned to said
10 each tag when said second permanent identification number of
11 said each tag corresponds to said second count.

1 44. The method of claim 43, further comprising the step of:
2 at said tag reader, transmitting an instruction to perform a second tag read.

1 45. The method of claim 43, further comprising the step of:
2 at said tag reader, incrementing a second reader count in response to said at least
3 one second clock signal.

1 46. The method of claim 45, further comprising the step of:
2 at said tag reader, indicating an error when said second reader count does not
3 correspond to said second permanent identification number.

1 47. The method of claim 45, further comprising the step of:
2 at said tag reader, storing said given reader count and a given second reader count
3 when more than one tag responds to one of said at least one second clock
4 signals that corresponds to said given second reader count.

1 48. The method of claim 47, wherein each tag is assigned a third
2 permanent identification number, further comprising the steps of:
3 at said tag reader, transmitting said given reader count and said given second
4 reader count followed by at least one third clock signal;

5 at each tag that responded to said one of said at least one second clock signal that
6 corresponds to said given second reader count,
7 incrementing a third tag count in response to said at least one third clock
8 signal, and
9 transmitting the third permanent identification number assigned to said
10 each tag when said third permanent identification number of said
11 each tag corresponds to said third tag count.

1 49. The method of claim 48, further comprising the step of:
2 at said tag reader, transmitting an instruction to perform a third tag read.

1 50. The method of claim 48, further comprising the step of:
2 at said tag reader, incrementing a third reader count in response to said at least
3 one third clock signal.

1 51. The method of claim 50, further comprising the step of:
2 at said tag reader, indicating an error when said third reader count does not
3 correspond to said third permanent identification number.

1 52. A system for conducting an inventory of tags, wherein each tag is
2 assigned a permanent identification number, the system comprising:
3 at a tag reader,
4 means for transmitting a wake-up signal followed by at least one clock
5 signal, and
6 means for incrementing a reader count in response to said at least one
7 clock signal;
8 at each tag,
9 means for incrementing a tag count in response to said at least one clock
10 signal, and

11 means for transmitting a response signal when said permanent
12 identification number of said each tag corresponds to said tag
13 count;
14 at said tag reader,
15 means for recording said reader count when one of said response signals
16 is received, thereby recording the presence of the tag that
17 transmitted said one of said response signals.

1 53. The system of claim 52, further comprising:
2 at said tag reader, means for transmitting an instruction to perform a tag read.

1 54. The system of claim 52, wherein the duration of tag transmissions
2 is fixed, further comprising:
3 at said tag reader, means for transmitting a further one of said at least one clock
4 signal after the tag transmission duration has elapsed.

1 55. The system of claim 52, further comprising:
2 at said tag reader, means for transmitting a further one of said at least one clock
3 signal after a tag response time has elapsed, wherein said tag response
4 time is the maximum duration of time between a tag reader transmission
5 and the reception at said tag reader of a corresponding tag transmission.

1 56. The system of claim 52, further comprising:
2 at each tag,
3 a sensor; and
4 means for transmitting the contents of said sensor.

1 57. The system of claim 52, further comprising:
2 means for transmitting a charging signal, thereby energizing the tags.

1 58. The system of claim 52, further comprising:
2 at said tag reader, means for storing a given reader count when more than one tag
3 responds to one of said at least one clock signal that corresponds to said
4 given reader count.

1 59. The system of claim 58, wherein each tag is assigned a second
2 permanent identification number, further comprising:
3 at said tag reader,
4 means for transmitting said given reader count followed by at least one
5 second clock signal, and
6 means for incrementing a second reader count in response to said at least
7 one second clock signal;
8 at each tag that responded to said one of said at least one clock signal that
9 corresponds to said given reader count,
10 means for incrementing a second tag count in response to said at least one
11 second clock signal, and
12 means for transmitting a second response signal when said second
13 permanent identification number of said each tag corresponds to
14 said second count; and
15 at said tag reader,
16 means for recording said second reader count when one of said second
17 response signals is received, thereby recording the presence of the
18 tag that transmitted said one of said second response signals.

1 60. The system of claim 59, further comprising:
2 at said tag reader, means for transmitting an instruction to perform a second tag
3 read.

1 61. The system of claim 59, further comprising:

2 at said tag reader, means for storing said given reader count and a given second
3 reader count when more than one tag responds to one of said at least one
4 second clock signal that corresponds to said given second reader count.

1 62. The system of claim 61, wherein each tag is assigned a third
2 permanent identification number, further comprising:

3 at said tag reader,

4 means for transmitting said given reader count and said given second
5 reader count followed by at least one third clock signal, and

6 means for incrementing a third reader count in response to said at least
7 one third clock signal;

8 at each tag that responded to said one of said at least one second clock signal that
9 corresponds to said given second reader count,

10 means for incrementing a third tag count in response to said at least one
11 third clock signal, and

12 means for transmitting a third response signal when said third permanent
13 identification number of said each tag corresponds to said third
14 tag count; and

15 at said tag reader,

16 means for recording said third reader count when one of said third
17 response signals is received, thereby recording the presence of the
18 tag that transmitted said one of said third response signals.

1 63. The system of claim 62, further comprising:

2 at said tag reader, means for transmitting an instruction to perform a third tag
3 read.

1 64. A method for conducting an inventory of tags, wherein each tag
2 is assigned a permanent identification number, the method comprising the steps
3 of:

4 at a tag reader,
5 transmitting a wake-up signal followed by at least one clock signal, and
6 incrementing a reader count in response to said at least one clock signal;
7 at each tag,
8 incrementing a tag count in response to said at least one clock signal, and
9 transmitting a response signal when said permanent identification number
10 of said each tag corresponds to said tag count; and
11 at said tag reader,
12 recording said reader count when one of said response signals is received,
13 thereby recording the presence of the tag that transmitted said one
14 of said response signals.

1 65. The method of claim 64, further comprising the step of:
2 at said tag reader, transmitting an instruction to perform a tag read.

1 66. The method of claim 64, wherein the duration of tag transmissions
2 is fixed, further comprising the step of:
3 at said tag reader, transmitting a further one of said at least one clock signal after
4 the tag transmission duration has elapsed.

1 67. The method of claim 64, further comprising the step of:
2 at said tag reader, transmitting a further one of said at least one clock signal after
3 a tag response time has elapsed, wherein said tag response time is the
4 maximum duration of time between a tag reader transmission and the
5 reception at said tag reader of a corresponding tag transmission.

1 68. The method of claim 64, further comprising the steps of:
2 at each tag,
3 sensing an external condition; and
4 transmitting information regarding said external condition.

1 69. The method of claim 64, further comprising the step of:
2 transmitting a charging signal, thereby energizing the tags.

1 70. The method of claim 64, further comprising the step of:
2 at said tag reader, storing a given reader count when more than one tag responds
3 to one of said at least one clock signal that corresponds to said given
4 reader count.

1 71. The method of claim 70, wherein each tag is assigned a second
2 permanent identification number, further comprising the steps of:
3 at said tag reader,
4 transmitting said given reader count followed by at least one second clock
5 signal, and
6 incrementing a second reader count in response to said at least one second
7 clock signal;
8 at each tag that responded to said one of said at least one clock signal that
9 corresponds to said given reader count,
10 incrementing a second tag count in response to said at least one second
11 clock signal, and
12 transmitting a second response signal when said second permanent
13 identification number of said each tag corresponds to said second
14 count; and
15 at said tag reader,
16 recording said second reader count when one of said second response
17 signals is received, thereby recording the presence of the tag that
18 transmitted said one of said second response signals.

1 72. The method of claim 71, further comprising the step of:
2 at said tag reader, transmitting an instruction to perform a second tag read.

1 73. The method of claim 71, further comprising the step of:
2 at said tag reader, storing said given reader count and a given second reader count
3 when more than one tag responds to one of said at least one second clock
4 signal that corresponds to said given second reader count.

1 74. The method of claim 73, wherein each tag is assigned a third
2 permanent identification number, further comprising the steps of:
3 at said tag reader,
4 transmitting said given reader count and said given second reader count
5 followed by at least one third clock signal, and
6 incrementing a third reader count in response to said at least one third
7 clock signal;
8 at each tag that responded to said one of said at least one second clock signal that
9 corresponds to said given second reader count,
10 incrementing a third tag count in response to said at least one third clock
11 signal, and
12 transmitting a third response signal when said third permanent
13 identification number of said each tag corresponds to said third
14 tag count; and
15 at said tag reader,
16 recording said third reader count when one of said third response signals
17 is received, thereby recording the presence of the tag that
18 transmitted said one of said third response signals.

1 75. The method of claim 74, further comprising the step of:
2 at said tag reader, transmitting an instruction to perform a third tag read.

1 76. A method for producing a tag for use in electronic inventory,
2 comprising the steps of:

3 manufacturing an application-specific integrated circuit (ASIC) including
4 inventory response circuitry;
5 programming said ASIC with a permanent identification number;
6 preprinting an antenna pattern and bonding pads on a flexible substrate using a
7 conductive material; and
8 flip-chip bonding said ASIC to said bonding pads using a conductive adhesive.

1 77. The method of claim 76, further comprising the step of:
2 applying an attachment means to a first portion of the tag, whereby said first
3 portion may be joined to a second portion of the tag to close the tag about
4 an object to be tagged; and
5 perforating said tag so that any attempt to remove a close tag from a tagged
6 object renders the tag inoperative.

1 78. The method of claim 76, wherein
2 said attachment means is an adhesive.

1 79. The method of claim 76, further comprising the steps of:
2 preprinting an anode on a first portion of said flexible substrate;
3 preprinting a cathode on a second portion of said flexible substrate;
4 applying at least one of a dielectric material and an electrolytic material to at least
5 one of said anode and said cathode; and
6 applying an attachment means to at least one of said anode and said cathode;
7 whereby a power supply means is formed by the subsequent attachment of said
8 anode and said cathode using said attachment means, and said power
9 supply means is destroyed by any attempt to thereafter detach said anode
10 and said cathode.

1 80. The method of claim 77, wherein
2 said attachment means is an adhesive.

1 81. The method of claim 76, further comprising the step of:
2 hermetically sealing said ASIC.

1 82. The method of claim 76, further comprising the steps of:
2 including at least one sensor on said tag.

3
4 83. The method of claim 76, further comprising the steps of:
5 testing the operability of the tag; and
6 marking the tag if the tag is inoperable.

1 84. A tag produced by the method of claim 76.

1 85. A tag produced by the method of claim 77.

1 86. A tag produced by the method of claim 78.

1 87. A tag produced by the method of claim 79.

1 88. A tag produced by the method of claim 80.

1 89. A tag produced by the method of claim 81.

1 90. A tag produced by the method of claim 82.

1 91. A tag produced by the method of claim 83.

System and Method for Electronic Inventory

Abstract

A system and method for conducting an inventory of tags, wherein each tag is assigned a Tag ID and a manufacturer number. Each tag can be attached to an item to take inventory of those items. A tag reader transmits a wake-up signal followed by at least one clock signal. Each tag increments a first tag count in response to the clock signals, and transmits the Tag ID assigned to the tag when the first tag count corresponds to the Tag ID assigned to the tag. The tag reader records the transmitted Tag IDs. When more than one tag transmits simultaneously, the tag stores the Tag ID in order to resolve the contention when the first read cycle is complete. In the second read cycle, the tag reader transmits the contended Tag ID followed by at least one clock signal. Each tag that contended for the transmitted Tag ID increments a second tag count in response to the clock signals, and transmits the manufacturer number assigned to the tag when the second tag count corresponds to the manufacturer number assigned to the tag. The tag reader records the transmitted Tag IDs, completing the inventory of the tags.

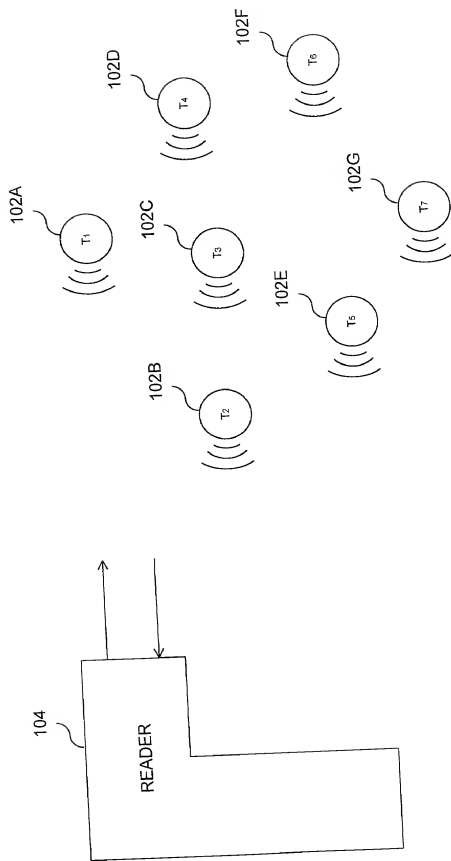


FIG. 1

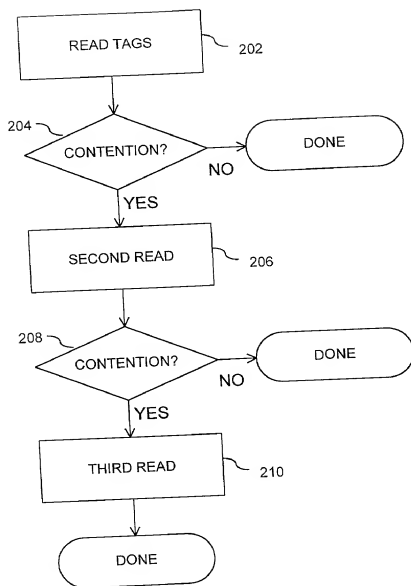


FIG. 2

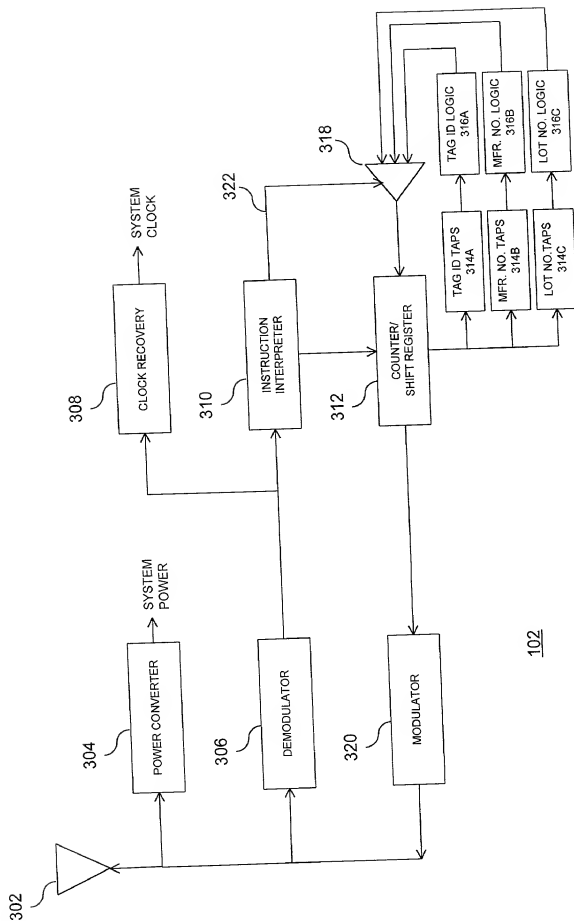


FIG. 3

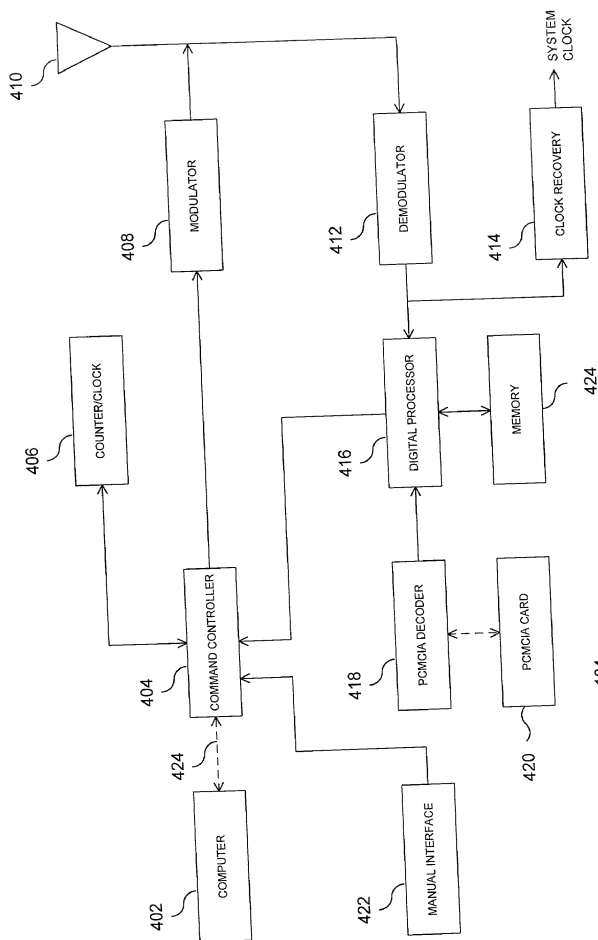
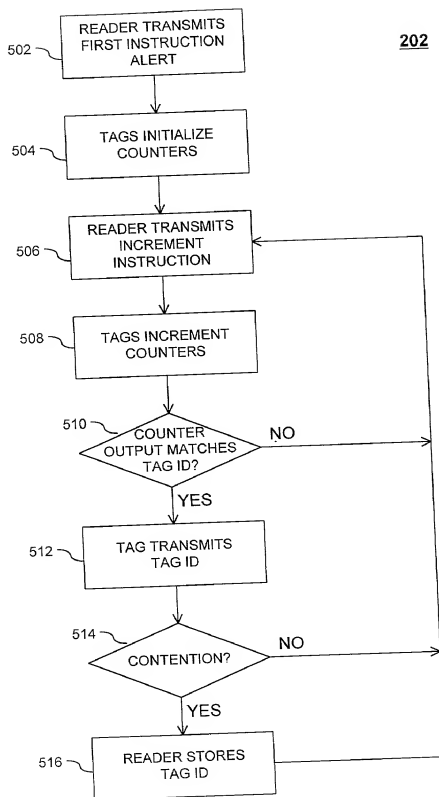


FIG. 4

104

202**FIG. 5**

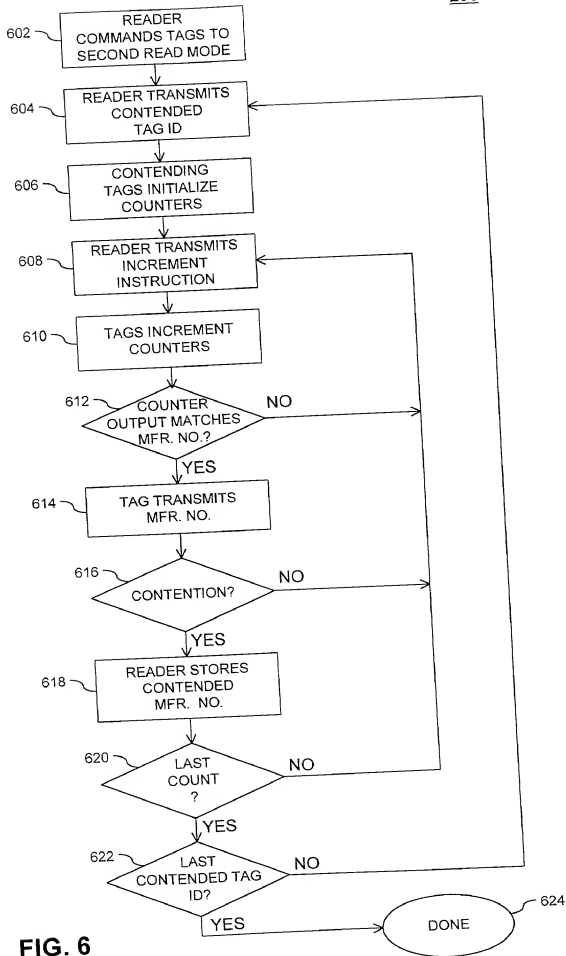


FIG. 6

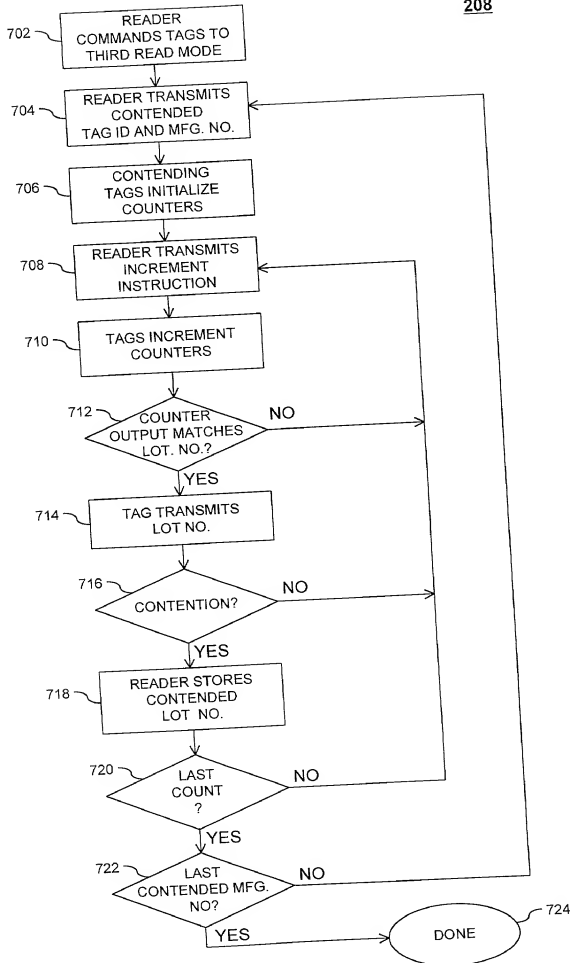


FIG. 7

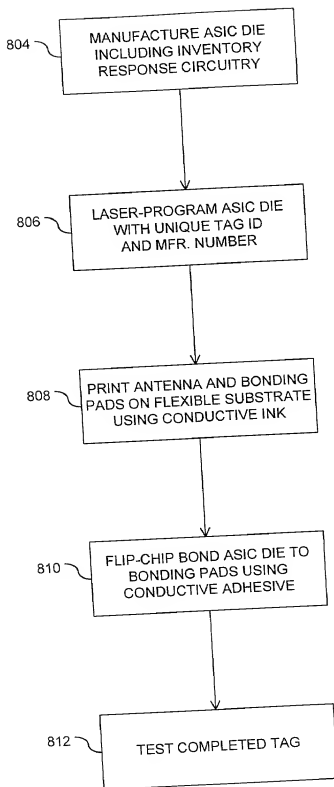


FIG. 8

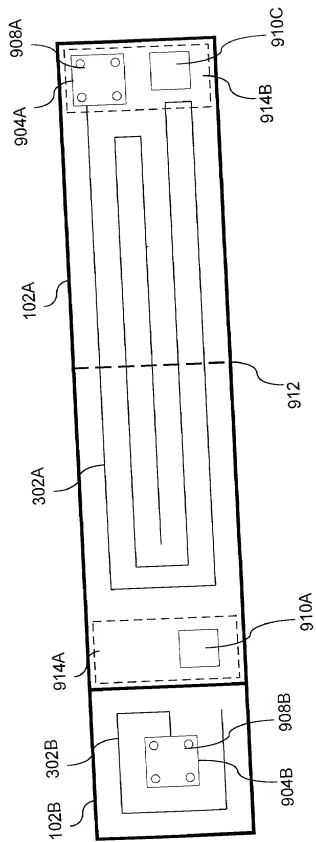


FIG. 9

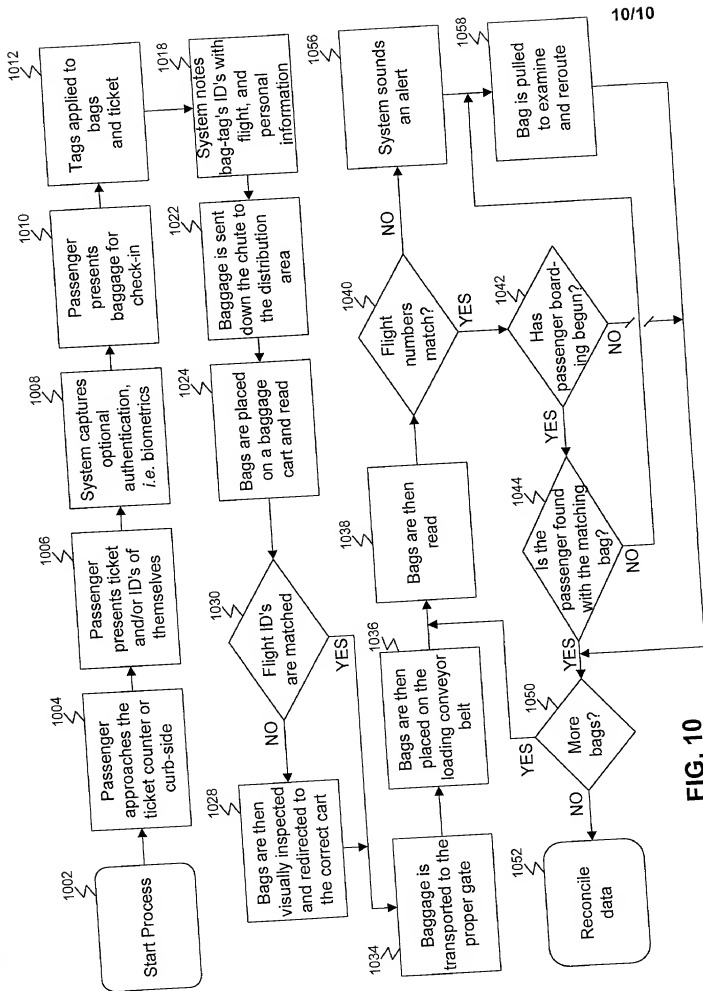


FIG. 10